



SSXM SERIES

Housing made of pressed stainless steel (grade 304) with sealed double ball race in swivelhead.

Available with top plate or single bolthole fixing.

WHEEL CODE		NY	RN	NP	ENP					
Wheel diam (mm)	Swivel or fixed	Tread width (mm)	Overall height (mm)	Plate type	Swivel radius (mm)	Bearing type	White nylon	Blue elastic rubber on black nylon	Red polyurethane on white nylon	82 Shore A blue polyurethane on white nylon

80	S	35 NP=33	110	A	72		SSXM80NY 190kg	SSXM80RN 100kg	SSXM80NP 190kg	SSXM80ENP 190kg
							SSXM80NYB 190kg	–	SSXM80NPB 190kg	SSXM80ENPB 190kg
80	F	35 NP=33	110	A	–		SSXMF80NY 190kg	SSXMF80RN 100kg	SSXMF80NP 190kg	SSXMF80ENP 190kg
							SSXMF80NYB 190kg	–	SSXMF80NPB 190kg	SSXMF80ENPB 190kg
100	S	33 NY=32	130	A	88		SSXM100NY 210kg	SSXM100RN 160kg	SSXM100NP 210kg	SSXM100ENP 210kg
							SSXM100NYB 210kg	SSXM100RNB 160kg	SSXM100NPB 210kg	SSXM100ENPB 210kg
100	F	33 NY=32	130	A	–		SSXMF100NY 210kg	SSXMF100RN 160kg	SSXMF100NP 210kg	SSXMF100ENP 210kg
							SSXMF100NYB 210kg	SSXMF100RNB 160kg	SSXMF100NPB 210kg	SSXMF100ENPB 210kg
125	S	35	155	A	107		SSXM125NY 230kg	SSXM125RN 230kg	SSXM125NP 230kg	SSXM125ENP 230kg
							SSXM125NYB 230kg	SSXM125RNB 230kg	SSXM125NPB 230kg	SSXM125ENPB 230kg
125	F	35	155	A	–		SSXMF125NY 230kg	SSXMF125RN 230kg	SSXMF125NP 230kg	SSXMF125ENP 230kg
							SSXMF125NYB 230kg	SSXMF125RNB 230kg	SSXMF125NPB 230kg	SSXMF125ENPB 230kg
150	S	40	181	A	121		SSXM150NY 250kg	–	SSXM150NP 250kg	SSXM150ENP 250kg
							SSXM150NYB 250kg	–	SSXM150NPB 250kg	SSXM150ENPB 250kg
150	F	40	181	A	–		SSXMF150NY 250kg	–	SSXMF150NP 250kg	SSXMF150ENP 250kg
							SSXMF150NYB 250kg	–	SSXMF150NPB 250kg	SSXMF150ENPB 250kg
150	S	45 RN=50	183	B	127		SSXM150NYLP 340kg	SSXM150RNLP 340kg	SSXM150NPLP 340kg	SSXM150ENPLP 340kg
							SSXM150NYBLP 340kg	–	SSXM150NPBLP 340kg	SSXM150ENPBLP 340kg
150	F	45 RN=50	183	B	–		SSXMF150NYLP 340kg	SSXMF150RNLP 340kg	SSXMF150NPLP 340kg	SSXMF150ENPLP 340kg
							SSXMF150NYBLP 340kg	–	SSXMF150NPBLP 340kg	SSXMF150ENPBLP 340kg
200	S	50	223	B	156		SSXM200NY 370kg	SSXM200RN 370kg	SSXM200NP 370kg	SSXM200ENP 370kg
							SSXM200NYB 370kg	–	SSXM200NPB 370kg	SSXM200ENPB 370kg
200	F	50	223	B	–		SSXMF200NY 370kg	SSXMF200RN 370kg	SSXMF200NP 370kg	SSXMF200ENP 370kg
							SSXMF200NYB 370kg	–	SSXMF200NPB 370kg	SSXMF200ENPB 370kg

Braked castors (swivel and wheelbrakes)

Single bolthole castor 80mm to 150mm (12mm)

Single bolthole castor 150mm to 200mm (16mm)

add to code: SWB


add to code: BH12

add to code: BH16

WHEEL BEARING KEY

- Plain bore
- Needle roller

AVAILABLE WHEEL TYPES (for full wheel specifications refer to pages indicated)

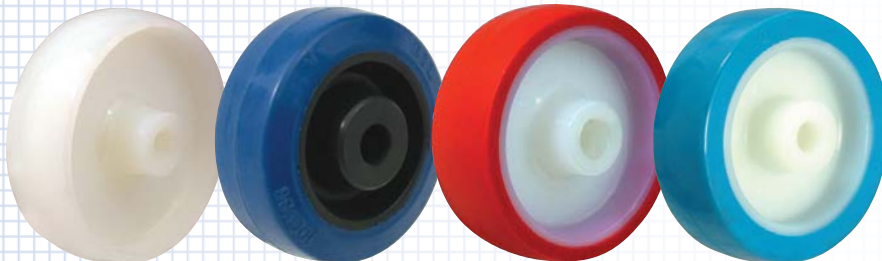

p79

p91

p94

p96



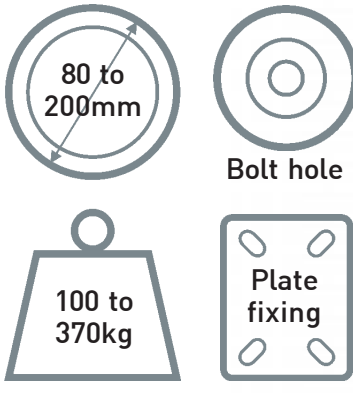


PLATE TYPES AND DIMENSIONS (mm)


Type A



Type B

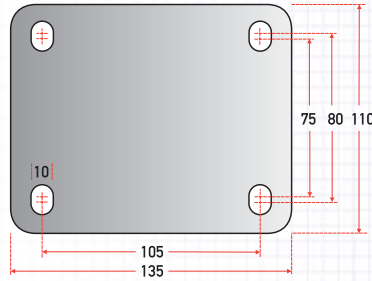

Single bolthole
add to code: BH12




Alternative fittings

SQUARE EXPANDERS



Tube section	Range for inside diameter of tube (mm)	Plug length (mm)	Plug material	Product code
Square	18.5 to 21.0	70	Nylon	SSEXS105/21
	21.5 to 24.0			SSEXS215/24
	25.0 to 30.0			SSEXS25/30

ROUND EXPANDERS



Tube section	Range for inside diameter of tube (mm)	Plug length (mm)	Plug material	Product code
Round	18.5 to 21.0	70	Nylon	SSEXR105/21
	21.5 to 24.0			SSEXR215/24
	25.0 to 30.0			SSEXR25/30

