



BZXM/MH SERIES

Housing and plate made of zinc-plated, pressed steel with double ball race in swivelhead.

Available with top plate or single bolthole fixing.

WHEEL CODE		AN*		TP	RNHT				
Wheel diam (mm)	Swivel or fixed	Tread width (mm)	Overall height (mm)	Plate type	Swivel radius (mm)	Bearing type	300C black phenolic	300C thermoplastic	250C black elastic rubber on phenolic

80	S	35	113	A	80		BZMH80AN3 150kg	-	-
							BZMH80AN3TF 150kg	-	-
	F		113	A	-	BZMHF80AN3 150kg	-	-	
						BZMHF80AN3TF 150kg	-	-	
100	S	30 AN=35	133	A	92		BZMH100AN3 180kg	BZMH100TP3 150kg	BZMH100RNHT 110kg
							BZMH100AN3TF 180kg	BZMH100TP3TF 150kg	BZMH100RNHTTF 110kg
	F		133	A	-	BZMH100ANBJ3 180kg	BZMH100TPBJ3 150kg	BZMH100RNBJHT 110kg	
						BZMHF100AN3 180kg	BZMHF100TP3 150kg	BZMHF100RNHT 110kg	
100	S	30 AN=35	135	B	92		BZMH100AN3LP 180kg	BZMH100TP3LP 150kg	BZMH100RNHTLP 110kg
							BZMH100AN3LPTF 180kg	BZMH100TP3LPTF 150kg	BZMH100RNHTLPTF 110kg
	F		135	B	-	BZMH100ANBJ3TF 180kg	BZMH100TPBJ3LP 150kg	BZMH100RNBJHTLP 110kg	
						BZMHF100AN3 180kg	BZMHF100TP3TF 150kg	BZMHF100RNHTTF 110kg	
125	S	40	158	A	107		BZMH125AN3 200kg	-	-
125	F		158	A	-		BZMHF125AN3 200kg	-	-
125	S		160	B	107		BZMH125AN3LP 200kg	-	-

100	S	30 AN=35	130	A	92		BZXM100AN3 150kg	BZXM100TP3 150kg	BZXM100RNHT 110kg
							BZXM100AN3TF 150kg	BZXM100TP3TF 150kg	BZXM100RNHTTF 110kg
	F		130	A	-	BZXM100AN3 150kg	BZXM100TP3 150kg	BZXM100RNHT 110kg	
						BZXM100AN3TF 150kg	BZXM100TP3TF 150kg	BZXM100RNHTTF 110kg	

* also available to 350°C temperature specification – details on request. Maximum temperature when brakes fitted 270°C


Single bolthole castor (12mm)

add to code: **BH12**

WHEEL BEARING KEY

- Plain bore
- Teflon bush
- Ball journal


AVAILABLE WHEEL TYPES (for full wheel specifications refer to pages indicated)

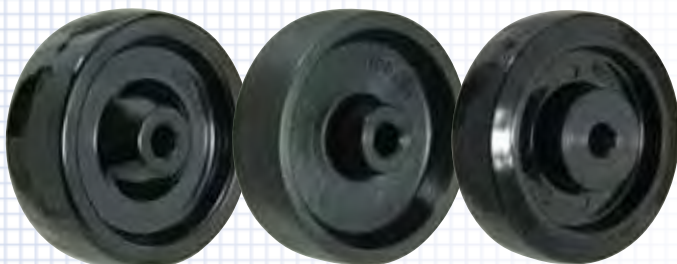

AN = p92

TP = p93


RN = p93

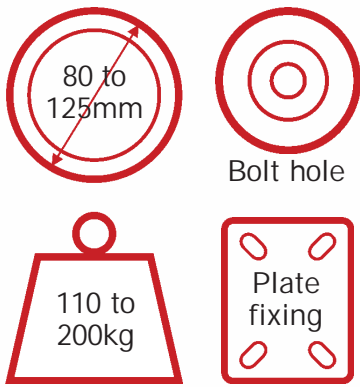


110-200kg

PLATE TYPES AND DIMENSIONS (mm)

Type A




Type B

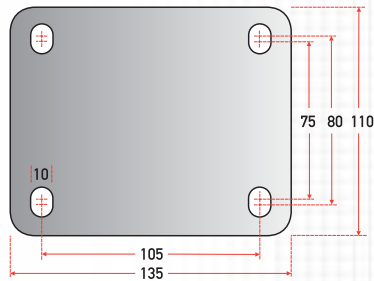

Single bolthole

add to code: BH12



BZXM/MH SERIES HIGH TEMP



110-200kg



SSMH/XM SERIES

Housing made of pressed stainless steel (grade 304) with sealed double ball race in swivelhead.

Available with top plate or single bolthole fixing.

SSMH/XM SERIES HIGH TEMP

WHEEL CODE

Wheel diam (mm) Swivel or fixed

Tread width (mm) Overall height (mm)

Plate type Swivel radius (mm)

Bearing type

AN*

300C black phenolic

TP

300C thermoplastic

RNHT

250C black elastic rubber on phenolic

80	S	35	113	A	80		SSMH80AN3 150kg	-	-
							SSMH80AN3TF 150kg	-	-
80	F	35	113	A	-		SSMHF80AN3 150kg	-	-
							SSMHF80AN3TF 150kg	-	-
100	S	30 AN=35	133	A	92		SSMH100AN3 180kg	SSMH100TP3 150kg	SSMH100RNHT 110kg
							SSMH100AN3TF 180kg	SSMH100TP3TF 150kg	SSMH100RNHTTF 110kg
100	F		133	A	-		SSMHF100AN3 180kg	SSMHF100TP3 150kg	SSMHF100RNHT 110kg
							SSMHF100AN3TF 180kg	SSMHF100TP3TF 150kg	SSMHF100RNHTTF 110kg
100	S	30 AN=35	135	B	92		SSMH100AN3LP 180kg	SSMH100TP3LP 150kg	SSMH100RNHTLP 110kg
							SSMH100AN3LPTF 180kg	SSMH100TP3LPTF 150kg	SSMH100RNHTLPTF 110kg
125	S	40	158	A	107		SSMH125AN3 200kg	-	-
125	F		158	A	-		SSMHF125AN3 200kg	-	-
125	S		160	B	107		SSMH125AN3LP 200kg	-	-

100	S	30 AN=35	130	A	92		SSXM100AN3 160kg	SSXM100TP3 150kg	SSXM100RNHT 110kg
							SSXM100AN3TF 160kg	SSXM100TP3TF 150kg	SSXM100RNHTTF 110kg
100	F	30 AN=35	130	A	-		SSXMF100AN3 160kg	SSXMF100TP3 150kg	SSXMF100RNHT 110kg
							SSXMF100AN3TF 160kg	SSXMF100TP3TF 150kg	SSXMF100RNHTTF 110kg

* also available to 350°C temperature specification – details on request. Maximum temperature when brakes fitted 270°C


Single bolthole castor (12mm)

add to code: **BH12**

WHEEL BEARING KEY

- Plain bore
- Teflon bush


AVAILABLE WHEEL TYPES (for full wheel specifications refer to pages indicated)

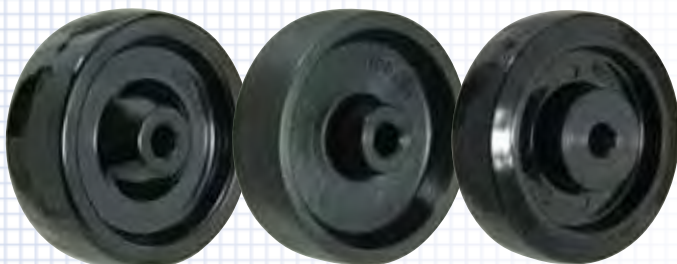

AN = p92

TP = p93

RN = p93



80 to
125mm



Bolt hole



110 to
200kg




Plate
fixing




110-200kg

PLATE TYPES AND DIMENSIONS (mm)

Type A




Type B

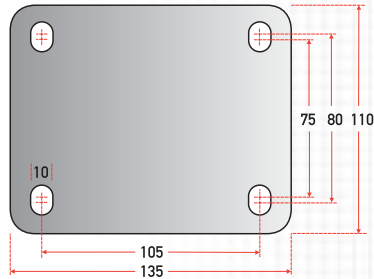

Single bolthole

add to code: BH12



SSMH/XM SERIES HIGH TEMP

