


Buffer wheels fit on the tubular legs of trolleys to reduce damage to walls, revolving on contact and maintaining the trolley at a safe distance from the wall.

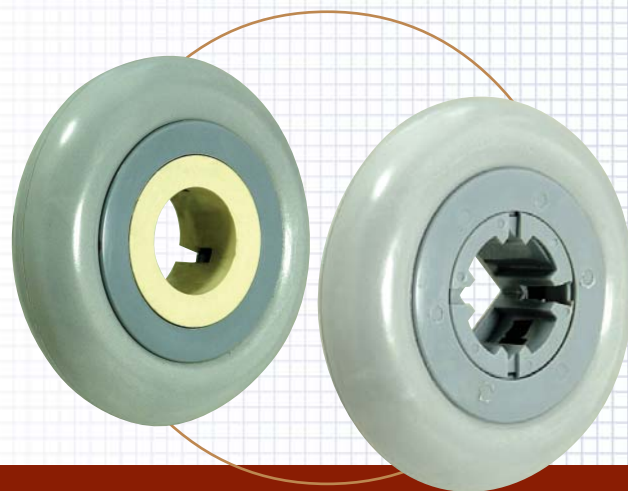


Wheel diameter (mm)	Outside diameter (mm)	Thread diameter (mm)	Tube size O.D. (mm)	Tube section	Tread width (mm)	Bore size (mm)	Length (mm)	Depth (mm)	Code
---------------------	-----------------------	----------------------	---------------------	--------------	------------------	----------------	-------------	------------	------

BUFFER WHEELS

114	-	-	25.4	Round	29	-	27 (hub)	-	BUF1R
114	-	-	25.4	Square	29	-	27 (hub)	-	BUF1SQ

BEARINGS (2 RS)

42	-	-	-	-	-	20	-	12	BEARING6004
						17	-	14	BEARING6303
47	-	-	-	-	-	20	-	14	BEARING6204
						25	-	12	BEARING6005
52	-	-	-	-	-	20	-	15	BEARING6304
						25	-	15	BEARING6205



HEADED SPACERS

Bearing diameter (mm)	Axle bore (mm)	Bearing length (mm)	Collar thickness (mm)	Collar diameter (mm)	Code
15	10.2	15	10	20	TH15X10X10
15	10.2	15	5	20	TH15X5X10
15	12.2	23	9	20	TH15X9X12
20	10.2	25	1	25	TH20X1X10
20	10.2	20	5	25	TH20X5X10
20	12.2	20	2	25	TH20X2X12
20	12.2	20	5	25	TH20X5X12
20	12.2	20	11	25	TH20X11X12
25	12.2	29	1.5	30	TH25X2X12
25	12.2	29	8	30	TH25X8X12
25	16.5	29	3	30	TH25X3X16
30	16.5	40	5	30	TH30X5X16
30	21	40	5	40	TH30X5X20
30	21	40	10	40	TH30X10X20
50	31	48	5	60	TH50X5X30

