


80-100kg

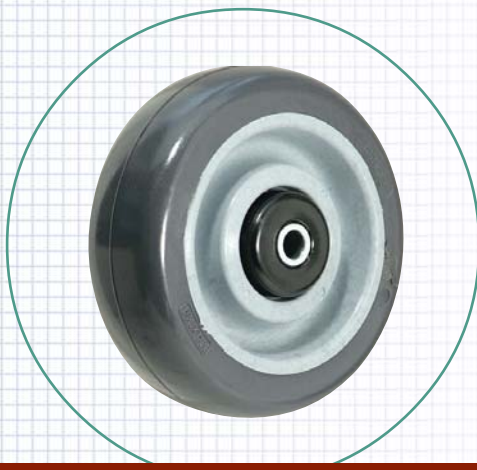

WPUA SERIES

Non-marking anti-static grey thermoplastic polyurethane tyre on polypropylene rim.


Hardness: 90±2 Shore A

Temperature range: -20°C to +70°C

Wheel diameter (mm)	Tread width (mm)	Bore size (mm)	Hub length (mm)	Ball journal bearing
100	32	8	36	BZM100WPUBJM8A 80kg
125	32	8	36	BZM125WPUBJM8A 100kg

THERMOPLASTIC WHEELS

The thermoplastic polyurethane tyre tread is injected onto the central core with double mechanical anchoring. The central polyamide core has original DIN 625 bearings fitted which are supplied with 2RS water-proofing as standard.

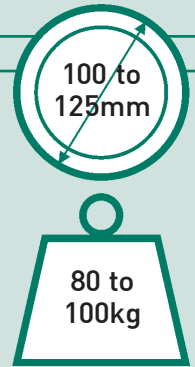

WPUA SERIES ANTI-STATIC

