


# WAPA SERIES

Non-marking anti-static grey polyurethane tyre on aluminium rim.


Hardness: 91 ± 3 Shore A  
Temperature range: -20°C to +80°C

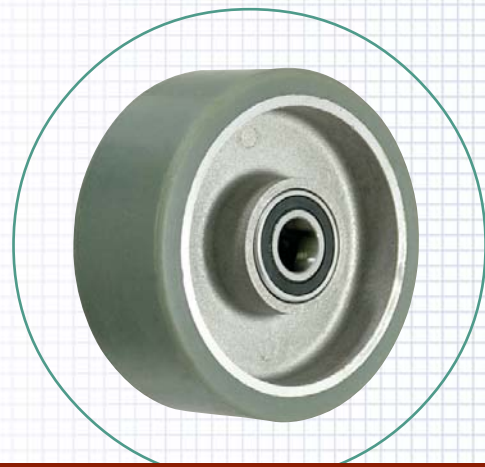

200-320kg

| Wheel diameter (mm) | Tread width (mm) | Bore size (mm) | Hub length (mm) | Ball journal bearing |
|---------------------|------------------|----------------|-----------------|----------------------|
|---------------------|------------------|----------------|-----------------|----------------------|

|     |    |    |    |                       |
|-----|----|----|----|-----------------------|
| 100 | 40 | 15 | 40 | BZH100WAPABJM15 200kg |
| 125 | 40 | 20 | 50 | BZH125WAPABJM20 240kg |
| 150 | 40 | 20 | 40 | BZH150WAPABJM20 320kg |

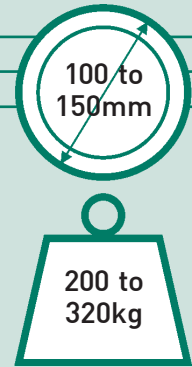

## ANTI-STATIC WHEELS

The tyre tread is bonded to the aluminium core and can be fitted with 2RS bearings as standard. These wheels can be supplied with stainless steel bearings for use in stainless steel brackets – details on request.

WAPA SERIES ANTI-STATIC

