

WMPU SERIES

Black, puncture-proof lightweight micro-cellular polyurethane tyre on welded-steel rim.



Hardness: 78±5 Shore A
Temperature range: -10°C to +60°C



120-180kg

Wheel diameter (mm)	Tread width (mm)	Bore size (mm)	Hub length (mm)	Grey centre needle roller bearing	Red centre needle roller bearing
---------------------	------------------	----------------	-----------------	-----------------------------------	----------------------------------

260	85	25	65	–	BZWMPUR2602565 120kg
	85	25.4	65	–	BZWMPUR26025465 120kg
	85	20	75	BZWMPUR26020 120kg	–
	85	25	75	BZWMPUR26025 120kg	–
	85	25.4	75	BZWMPUR260254 120kg	–
400	105	25	75	–	BZWMPUR4002565 180kg
	105	25.4	75	–	BZWMPUR40025465 180kg
	105	25	75	BZWMPUR40025 180kg	–
	105	25.4	75	BZWMPUR400254 180kg	–

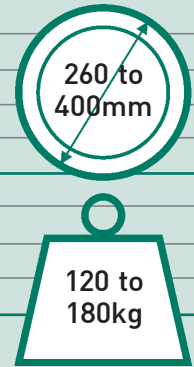

Ribbed pattern standard



Diamond pattern available on request

WMPU SERIES PUNCTURE-PROOF

