

WCR/WCU SERIES

Elastic rubber tyre on cast-iron rim.

Hardness: 75±3 Shore A

Temperature range: -20°C to +60°C




160-1050kg

Wheel diameter (mm)	Tread width (mm)	Bore size (mm)	Hub length (mm)	Plain bearing	Needle roller bearing	Ball journal bearing
---------------------	------------------	----------------	-----------------	---------------	-----------------------	----------------------

100	38	12	45	–	BZMH100WCRRB12 160kg	–
	38	15	48	–	BZH100WCRRB15 160kg	–
	38	20	45	BZMH100WCRM20 160kg	–	BZMH100WCRBJM20 160kg
	38	23	50	BZH100WCRM23 160kg	–	–
	50	20	50	–	–	BZH100WCRBJM20 210kg
125	38	12	45	–	BZMH125WCRRB12 190kg	–
	38	15	48	–	BZH125WCRRB15 190kg	–
	38	20	45	BZMH125WCRM20 190kg	–	BZMH125WCRBJM20 190kg
	38	23	48	BZH125WCRM23 190kg	–	–
150	50	20	60	BZH125WCRM20 300kg	BZH125WCRRB20 300kg	BZH125WCRBJM20 300kg
	50	20	60	BZH150WCRM20 300kg	BZH150WCRRB20 300kg	BZH150WCRBJM20 300kg
	50	25.4	60	–	BZH150WCRRB254 300kg	–
200	50	20	60	BZHL200WCRM20 450kg	BZHL200WCRRB20 450kg	BZHL200WCRBJM20 450kg
	50	25.4	60	–	BZHL200WCRRB254 450kg	–
	50	25	60	–	–	BZH200WCRBJM25 600kg
	75	25	82	–	–	BZXH200WCRBJM25 600kg
250	50	20	60	–	–	BZHL250WCRBJM20 500kg
	50	25.4	60	–	BZHL250WCRRB254 500kg	–
	75	25	82	–	–	BZH250WCRBJM25 750kg
	100	30	108	–	–	BZXXH250WCRBJM30 1020kg
300	75	25	82	–	–	BZXH300WCRBJM25 850kg
400	75	30	92	–	–	BZMH400WCRBJM30 1050kg
SPEED WHEELS – 16 kph intermittent						4 kph
150	50	20	60	–	–	BZH150WCUBJM20 300kg*
200	50	20	60	–	–	BZHL200WCUBJM20 450kg**

* at 16kph 120kg

** at 16kph 180kg

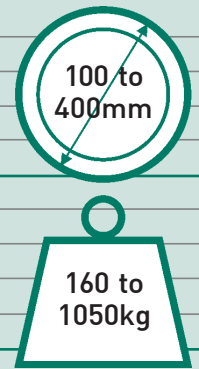

WCR/WCU SERIES RUBBER/CAST IRON

